# Extremely small-sized cylinder bed!



Variable top feed, interlock stitch machines with an extremely small-sized cylinder bed (circumference:113 mm)

W(T)200 Series

177mm

W(T)600 Series

270mm

Thanks to this cylinder bed, the sewing of small-sized tubular goods, such as sleeve openings and bottoms of wear for children and babies, which would otherwise be difficult, is easy.
This feature increases the quality of sewn products.

WT169 Series

Equipped with the belt type bottom feed mechanism and a top feed dog, these machines sew cross seam sections smoothly, so that no plyshifting and/or twisting occurs on the fabric during sewing. Neatly finished products are obtained.



## WT169 Series

#### **Subclasses**


WT169-03

for Covering

WT169-08

for Hemming


Photo: WT169-08Ax356BT/UT3J

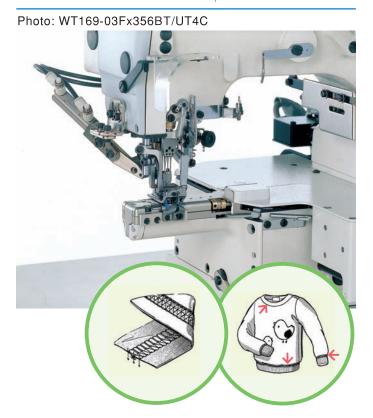



### **Common specifications**

*1 Subclasses	Į	۵	<b>]⊹]</b>	*2 Type of needle plate	<u>₽</u>	<b>★</b> 5 mm	<u>+</u>	rpm	*3 Option
WT169-03F	3	5	5.6	вт	0.8-3.3	1-5	4.5	4,000	Underbed thread trimmer (UT3J/ UT4C)
WT169-03G				BS					
WT169-08A	2	4	4	вт					
			4.8	вт					
	3	5	5.6	BT/BS					
			6.4	BS					



<sup>\*2</sup> BT: For standard stitch length (1.8 to 2.3mm) and forms a <u>soft</u> seam (enough looper thread come out). BS: For standard stitch length (1.8 to 2.3mm) and forms a <u>tight</u> seam.

\*3 Please see the following type of UT device.

UT3J: Pneumatic underbed thread trimmer, needle thread wiper, presser foor lift UT4C: Pneumatic underbed thread trimmer, top cover thread trimmer, presser foor lift

Note: Details of the specifications vary according to each subclass and sewing conditions.





#### PEGASUS SEWING MACHINE MFG.CO.,LTD.

5-7-2 Sagisu, Fukushima-ku, Osaka 553-0002, Japan TEL:81-6-6458-4739 FAX:81-6-6454-8785 URL http://www.pegasus.co.jp

